


Product Specification: GC-HD2

Material Thickness	2.4 mm (Heavy Duty)
Weld Spacing	260 mm
Cell Size (Expanded)	180mm (7.2 in) x 150mm (6 in)
Depth	50mm (2 in)
Material	100% Virgin HDPE
Status	Commercial / Military
Density	High Density
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m (Double-Weld)
Splitting Strength	2400 N [32 KN/m](min.avg.)
Tensile Strength	> 2000 LBS/SQ FT
ESCR	≥ 5,000 hours



Ref. 202408BC2

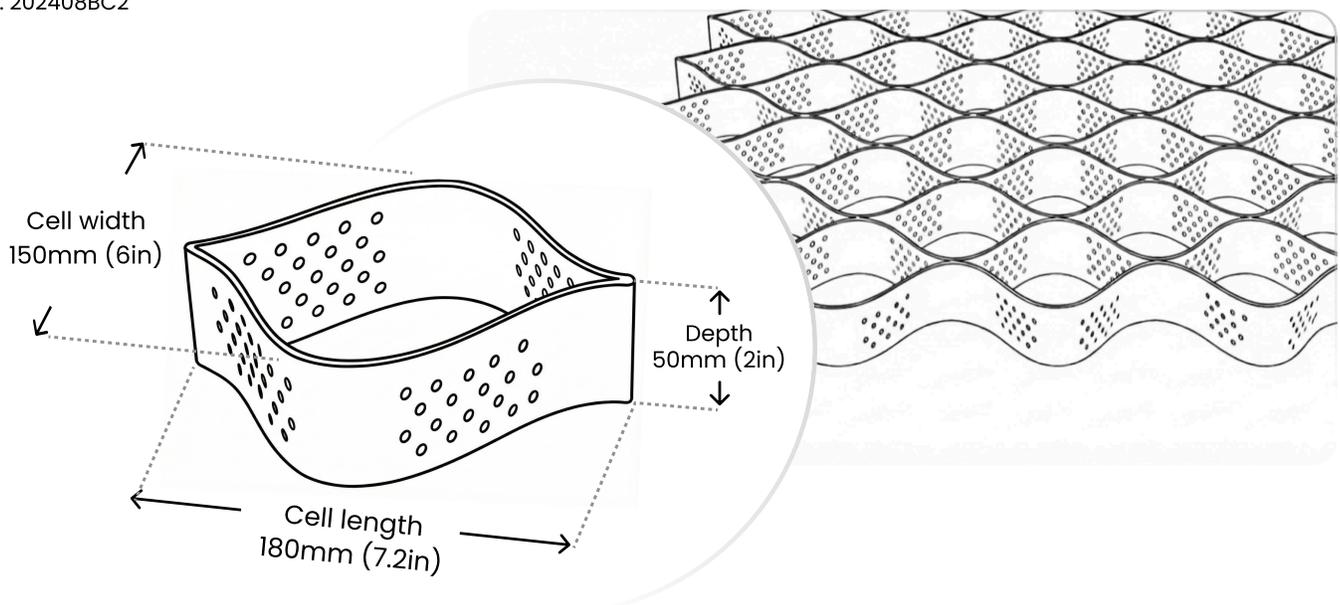


Product Specification: GC-HD3

Material Thickness	2.4 mm (Heavy Duty)
Weld Spacing	260 mm
Cell Size (Expanded)	180mm (7.2 in) x 150mm (6 in)
Depth	75mm (3 in)
Material	100% Virgin HDPE
Status	Commercial / Military
Density	High Density
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m (Double-Weld)
Splitting Strength	2400 N [32 KN/m](min.avg.)
Tensile Strength	> 2000 LBS/SQ FT
ESCR	≥ 5,000 hours



Ref. 201903E7

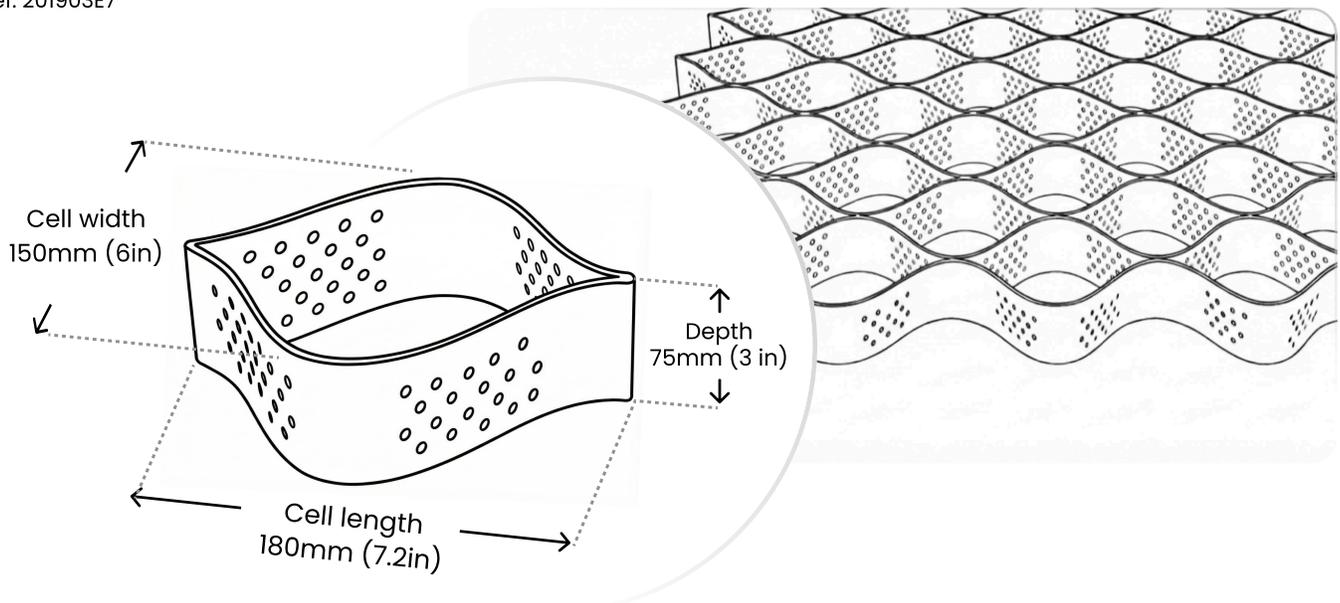


Product Specification: GC-HD4

Material Thickness	2.4 mm (Heavy Duty)
Weld Spacing	260 mm
Cell Size (Expanded)	180mm (7.2 in) x 150mm (6 in)
Depth	100mm (4 in)
Material	100% Virgin HDPE
Status	Commercial / Military
Density	High Density
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m (Double-Weld)
Splitting Strength	2400 N [32 KN/m](min.avg.)
Tensile Strength	> 2000 LBS/SQ FT
ESCR	≥ 5,000 hours



Ref. 202408BC4

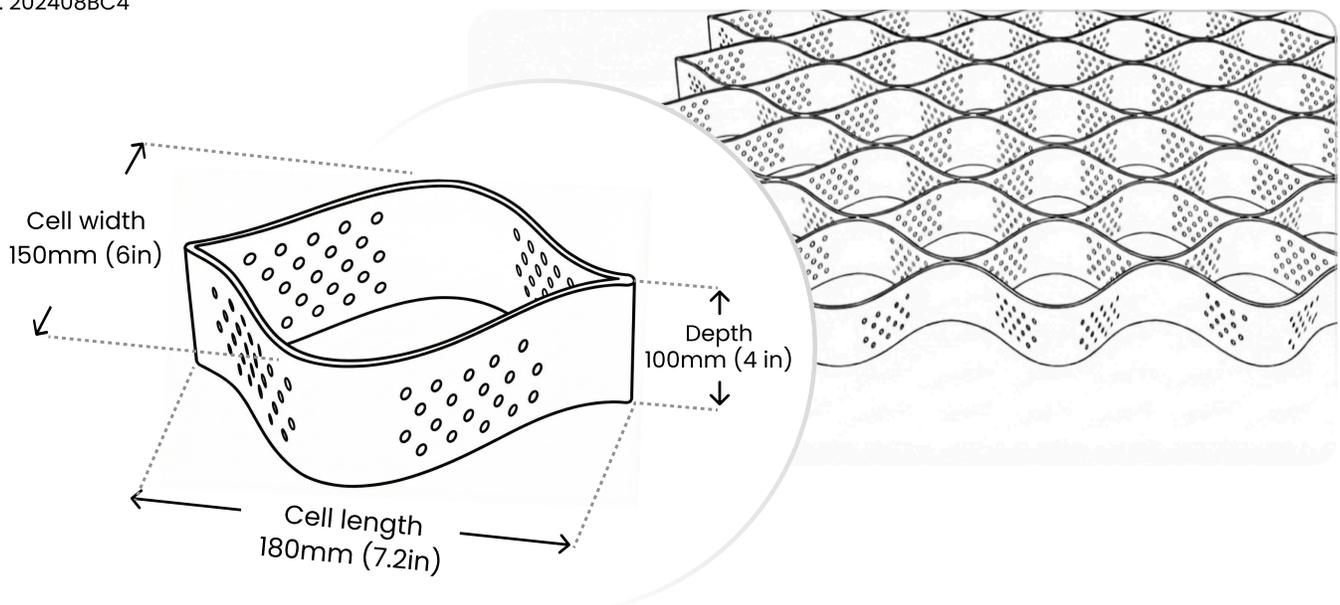

Product Specification: GC-HD6

Material Thickness	2.4 mm (Heavy Duty)
Weld Spacing	260 mm
Cell Size (Expanded)	180mm (7.2 in) x 150mm (6 in)
Depth	150mm (6 in)
Material	100% Virgin HDPE
Status	Commercial / Military
Density	High Density
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m (Double-Weld)
Splitting Strength	2400 N [32 KN/m](min.avg.)
Tensile Strength	> 2000 LBS/SQ FT
ESCR	≥ 5,000 hours



Ref. 202408BC6

