


Product Specification: GC-SD2

Material Thickness	1.7 mm (Reinforced)
Weld Spacing	445 mm
Cell Size (Expanded)	310mm (12.3 in) x 260mm (10.3 in)
Depth	50mm (2 in)
Material	100% Virgin HDPE
Status	Residential
Density	Standard
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m
Splitting Strength	3200 N [32 KN/m](min.avg.)
Tensile Strength	≥ 22 KN/m
ESCR	≥ 5,000 hours




Ref. 201903E7

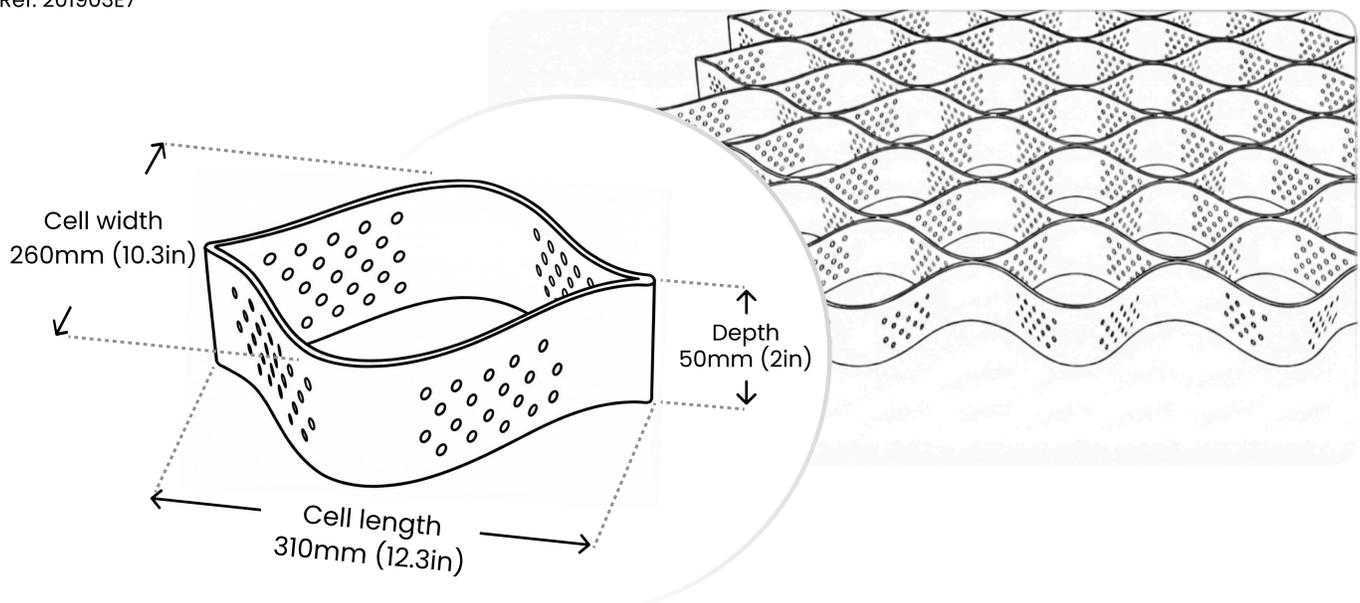


Product Specification: GC-SD3

Material Thickness	1.7 mm (Reinforced)
Weld Spacing	445 mm
Cell Size (Expanded)	310mm (12.3 in) x 260mm (10.3 in)
Depth	75mm (3 in)
Material	100% Virgin HDPE
Status	Residential
Density	Standard
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m
Splitting Strength	3200 N [32 KN/m](min.avg.)
Tensile Strength	≥ 22 KN/m
ESCR	≥ 5,000 hours

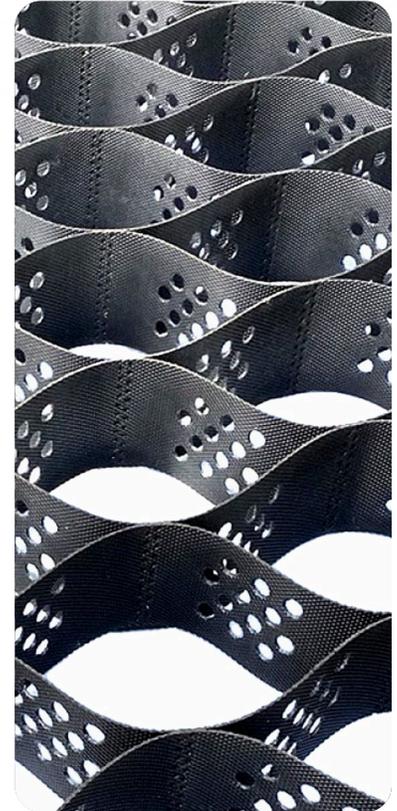


Ref. 201903E7

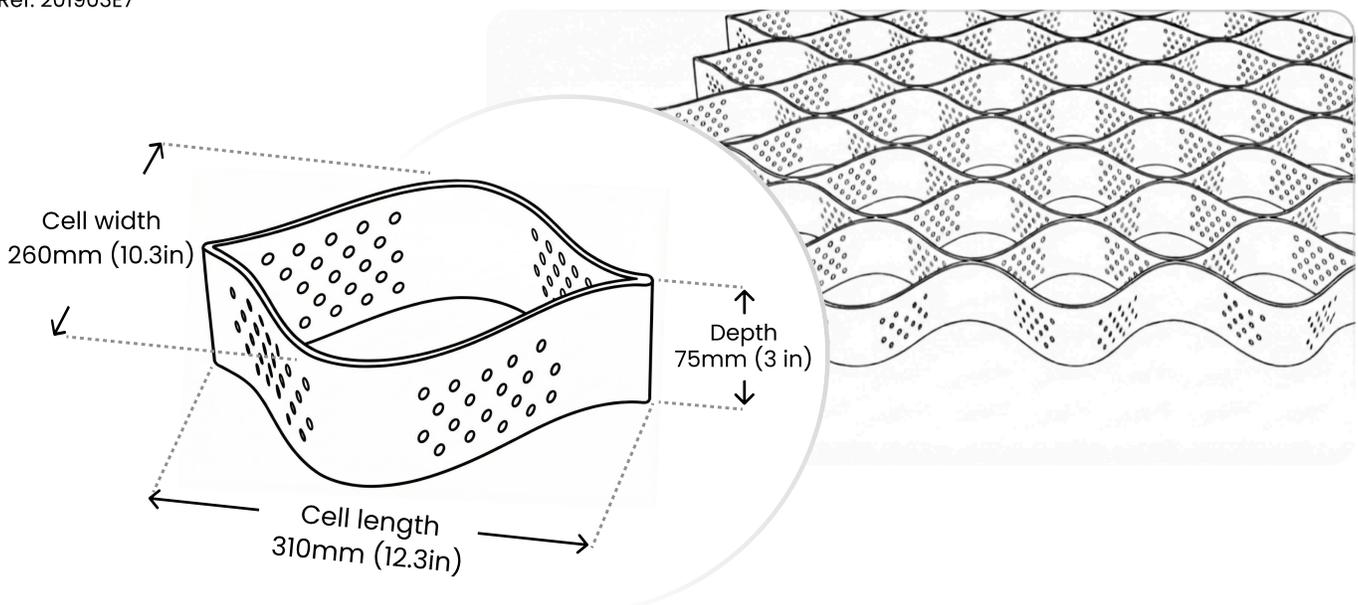


Product Specification: GC-SD4

Material Thickness	1.7 mm (Reinforced)
Weld Spacing	445 mm
Cell Size (Expanded)	310mm (12.3 in) x 260mm (10.3 in)
Depth	100mm (4 in)
Material	100% Virgin HDPE
Status	Residential
Density	Standard
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m
Splitting Strength	3200 N [32 KN/m](min.avg.)
Tensile Strength	≥ 22 KN/m
ESCR	≥ 5,000 hours

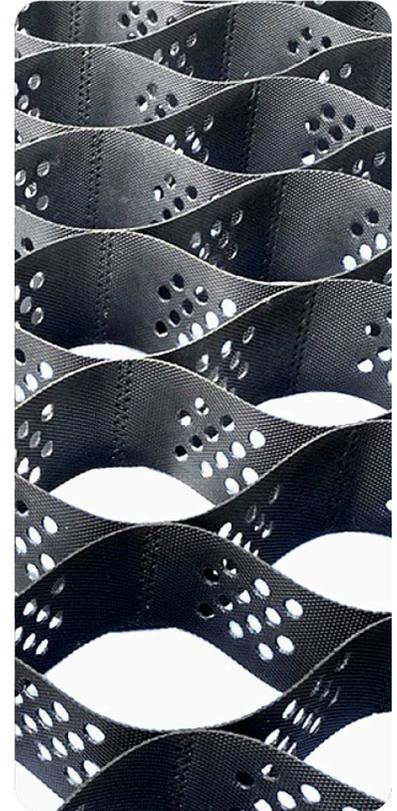

Ref. 201903E7

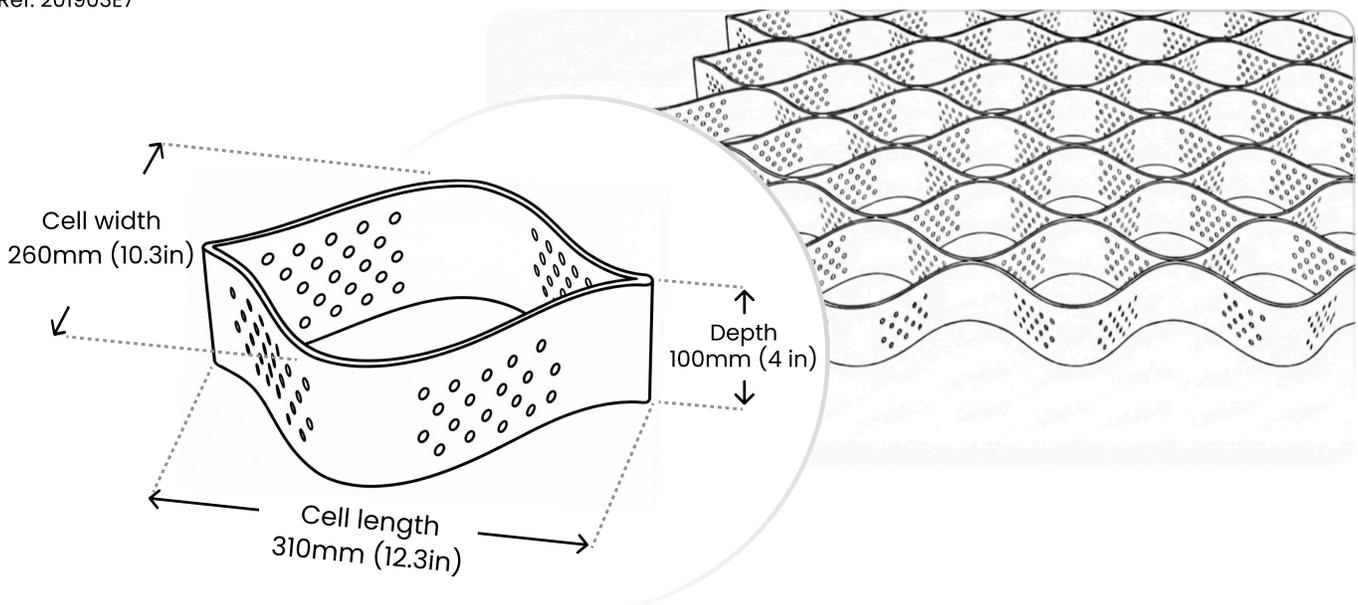

Product Specification: GC-SD6

Material Thickness	1.7 mm (Reinforced)
Weld Spacing	445 mm
Cell Size (Expanded)	310mm (12.3 in) x 260mm (10.3 in)
Depth	150mm (6 in)
Material	100% Virgin HDPE
Status	Residential
Density	Standard
Carbon Black	≥ 1.5%
Peeling Strength	≥ 14.2 KN/m
Splitting Strength	3200 N [32 KN/m](min.avg.)
Tensile Strength	≥ 22 KN/m
ESCR	≥ 5,000 hours



Ref. 201903E7

